ExamBoosts

TRY BEFORE YOU BUY

Download a free sample of any of our exam questions and answers

- 24/7 customer support, Secure shopping site
- Free One year updates to match real exam scenarios
- If you failed your exam after buying our products we will refund the full amount back to you.

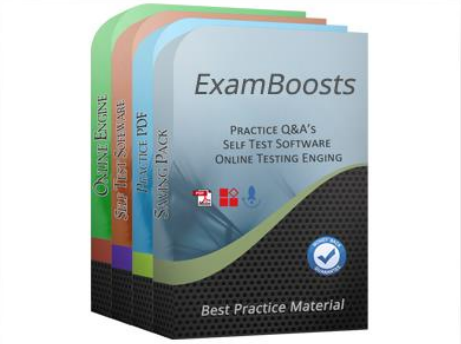

365 Days Free Updates

Free update is available within 365 days after your purchase. After 365 days, you will get 50% discounts for updating.

Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.

Instant Download

After Payment, our system will send you the products you purchase in mailbox in a minute after payment. If not received within 2 hours, please contact us.

Money Back Guarantee

Full refund if you fail the corresponding exam in 60 days after purchasing. And Free get any another product.

http://www.examboosts.com/

Reliable & Efficient Test Practice Questions to Satisfy All Candidates

Exam : JN0-120

Title : Juniper networks Certified internet associate.e(jncia-e)

Vendors : Juniper

Version : DEMO

1.By default, how does the router handle changes to its operational configuration?
A. Changes are not implemented, but are saved automatically.
B. Changes are not implemented and must be written into memory.
C. Changes are implemented immediately and saved automatically.
D. Changes are implemented immediately, but must be written into memory.
Answer: C

2.You would like to configure your PC's IP address of 10.10.0.156 as an FTP host with a username of user and a password of mypass. Which configuration command accomplishes this goal.?
A. host userpc 10.10.0.156 ftp user mypass
B. host userpc 10.10.0.156 tftp user mypass
C. hostname userpc 10.10.0.156 ftp user mypass
D. hostname userpc 10.10.0.156 tftp user mypass
Answer: A

3.Where should you install the spare line module in a redundancy group?
A. last slot in the chassis
B. first slot in the chassis
C. lowest numbered slot in the group
D. highest numbered slot in the group
Answer: C

4.Given the following router output, which configuration file will the router use at its next reload?

```
erx3#dir
                                unshared                          in
     file            size       size        date                  use
---------------     --------    -------   ------------------     ---
lab1.cnf             44191       44191    04/27/2000   15:40:38
clientpppoa.cnf      45442       45442    04/26/2000   10:20:14
clientpppoe.cnf      46598       46598    04/26/2000   09:35:24
clientqos.cnf        45587       45587    04/13/2000   07:03:56
reboot.hty           30080       30080    01/01/1970   00:00:00
system.log             168         168    01/01/1970   00:00:00
atmpvc.mac             288         288    04/28/2000   14:55:00
1-3-1.rel         30929563    30842577    04/28/2000   13:31:26   !
1-3-0.rel         30891326    30804340    03/30/2000   12:57:32
clientqos.scr        797         797     04/12/2000   18:39:58
clientpppoa.scr      719         719     11/01/1999   13:03:18
clientpppoe.scr     1218        1218     11/01/1999   13:04:10
bulkstats1.sts       487         487     04/28/2000   15:09:22
test.txt            2308        2308     08/28/2000   15:27:22

Capacity = 85196800, Bytes Free = 6871936, Reserved = 15728640
```

A. config
B. clientqos.cnf
C. startup-config
D. running-configuration

Answer: D

5.What does the SRP distribute to the line modules when a routing table changes?
A. updated RIB-Out
B. link-state information
C. an incremental update
D. the complete routing table
Answer: D

6.How are the slot groups arranged in the ERX 700 Series Edge Router?
A. Group 1 - Slots 0 &1 Group 2 - Slot 2 Group 3 - Slot 3 Group 4 - Slot 4
B. Group 1 - Slots 2 & 3 Group 2 - Slot 4 Group 3 - Slot 5 Group 4 - Slot 6
C. Group 1 - Slot 2 Group 2 - Slot 3 Group 3 - Slot 4 Group 4 - Slot 5 & 6
D. Group 1 - Slot 3 Group 2 - Slot 4 Group 3 - Slot 5 Group 4 - Slots 6 & 7
Answer: B

7.Which protocol is used to transfer files to on the ERX Edge Router? (Choose two.)
A. SCP
B. FTP
C. RCP
D. TFTP
Answer: B,D

8.You would like to install an OC-48c line module in an ERX 1440 Edge Router. Which slots can support this configuration?
A. 0 and 1
B. 1 and 2
C. 2 and 3
D. 3 and 4
Answer: C

9.What are two ways that IP datagrams are passed from the ingress line module to the egress line module? (Choose two.)
A. over an ATM PVC
B. over a FastEthernet bus
C. over a Gigabit Ethernet bus
D. over high speed serial bus
Answer: A,D

10.Which service does the ERX Edge Router support with a virtual router?
A. voice over IP
B. wholesale services
C. IP quality of service
D. SNMP management

Answer: B

11.Your ERX router is supporting 100 virtual routers. A specific line module supports IP interfaces in 5 virtual routers. How many routing tables are maintained on that module?
A. 0
B. 1
C. 5
D. 100
Answer: C

12.Which configuration command creates a virtual router called isp-1?
A. virtual-router isp-1
B. virtual-router ISP-1
C. virtual-router VR isp-1
D. virtual-router VR ISP-1
Answer: A

13.You would like to configure an ATM PVC with a virtual circuit identifier of 33 on virtual path 0. The PVC should use an unspecified bit rate and be encapsulated in the AAL5SNAP format. Which command accomplishes this goal?
A. atm pvc 0/33 aal5snap
B. atm pvc 33 0 33 aal5snap
C. atm pvc 0/33 aal5snap ubr
D. atm pvc 33 0 33 aal5snap ubr
Answer: B

14.Which two forms of DSL connectivity provide the same bandwidth in both directions? (Choose two.)
A. ADSL
B. HDSL
C. SDSL
D. RADSL
Answer: B,C

15.Which protocol is used between the RAS and the authentication server in a narrowband network environment?
A. RADIUS
B. PPP PAP
C. MS CHAP
D. PPP CHAP
Answer: A

16.Which two B-RAS service offerings do not require user authentication? (Choose two.)
A. Routed 1483
B. Bridged 1483

C. PPP over ATM
D. PPP over Ethernet
Answer: A,B

17.In a bridged 1483 network, which configuration command allows the ERX Edge Router to advertise customer networks into the provider's IGP?
A. redistribute direct
B. redistribute static
C. redistribute connected
D. redistribute access-internal
Answer: C

18.Which two statements are correct concerning DHCP Internal Server in the E-series router? (Choose two.)
A. Provide dynamic IP addresses for DSIs.
B. Provide connectivity to DHCP servers on other subnetworks.
C. Provide dynamic IP addresses for SRC applications.
D. Provide dynamic IP addresses from pools used for PPPoE subscribers.
Answer: A,C

19.Which command configures an ATM PVC in a Bridged 1483 network?
A. atm pvc 33 0 33 aal5snap
B. atm pvc 33 0 33 aal5bridge
C. atm pvc 33 0 33 bridge1483
D. atm pvc 33 0 33 1483bridge
Answer: A

20.A service provider is operating a Routed 1483 network where the ATM PVCs are treated as a large subnet. What is a consequence of this configuration?
A. It burns up IP addresses.
B. It conserves IP addresses.
C. It results in a smaller routing table.
D. Each PVC has a separate /30 subnet.
Answer: B